POWER YOUR FUTURE Cummins Generator LG160C

6CTAA8.3-G2

Prime Power: 160KW/200KVA Standby Power: 176KW/220KVA

GENERATING POWER SOLUTIONS

Increased availability for new operations Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer

transport and installation.

Reduced service & maintenance costs Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value Designed and built to last.

SAFETY

Operate safely in accordance with proper operation manual.
To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

Cummins Series 25KVA--2000KVA



FUAN LONGKAI POWER CO., LTD.

Headquarters: Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China Tel:+86-0593-6309773 Fax:+86-0593-6586988 E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG160C
Rated prime power	kva	200
Rated standard power	kva	220
Rated voltage line to line	V	400/230
Rated current	А	289
Maximun sound level	dB(@7m)	96

Engine-DCEC Cummins

Model		6CTAA8.3-G2	
Aspiration	Turbo, Air/Air Cooling		
Fuel system		PB type	
No. cylinders		6 in line	
Displacement	Liquid	8.3	
Bore*Stroke	mm	114*135	
Compression ratio		17.3: 1	
Rated speed	r/min	1500	
Rated net power(with fan)	Kw	183	
Governor type		Electrical	
Start Motor	V	24	

Exhause System		
Exhause gas flow	litre/sec	480
Exhause gas temp	°C	510
Max back pressure	kPa	10

Aspiration System

Max inlet pressure	kPa	100
Combustion volume	kPa	/
Air flow	litre/sec	183

Fuel System		
100% load(Prime power)	L/h	45.0
75% load(Prime power)	L/h	34.0
50% load(Prime power)	L/h	23.0
Fuel tank capacity	L	480

Lubrication System		
Oil capacity	L	23.8
Oil consumption	g/kwh	0.5
Oil pressure	kPa	103-414
(continuous operation)		

Cooling System

12.3
83-95
104

Alternator			
Model	LONGKAI	LK274H	
	STAMFORD	UCI274H	
Phase		3	
Voltage	V	400/230	
Wiring Type	3 Pha	ase 4 wire, Y type	
Bearing		1	
Power factor		0.8	
Frequency	Hz	50	
Prime power	KW	160	
Exciter Type	Brushless, self-excitation		
Voltage regulation	%	±0.5	
Protection Grade		IP 23	
Insulation grade		H/H	
Altitude	m	≤1000	
Controller-DEEPSEA			
Model		DSE6120MK3	
Protective functions:			
Low oil pressure			
High water temperature			
High/low voltage			
High Engine Temperature	e and Overspe	ed.	
Voltage regulator frequency regulator			
Emergency stop			
Start failure			
	-		



Control Module Options

		Geneel Co	-
	U 8.0		
	N 8.85 80 N 40 86		1000
停机度:	\$.):		
1000	-		
	- 🐼 🛛	ଞ 🔳	
لطب		a Manual An Dec	



Auto generator control module

- Control module with" Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

LG160C



Standard Features

Engine(DCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

Options

Battery charge		0
Engine heater		0
Alternator heater		0
PMG		0
Water oil separator		0
Daily fuel tank		0
Remote control panel		0
Automatic transfer switcl	h/ATS	0
Switch box		0
Standard: •	Options: o	

Warranty*


Cummins Engine


12 months from date of purchase and 1000 hours.


Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

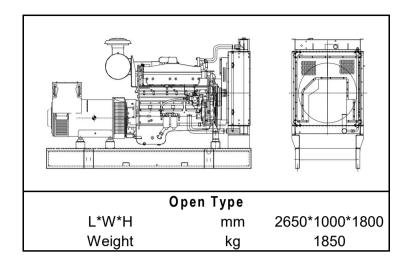

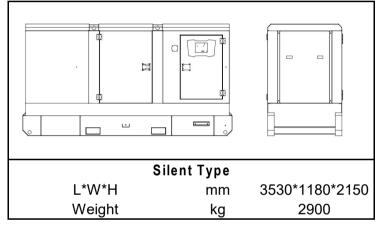

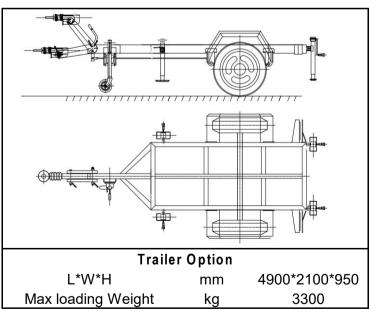



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.