POWER YOUR FUTURE

Cummins Generator LG200C

QSNT-G6

Prime Power: 200KW/250KVA

Standby Power: 220KW/275KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.



- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series

25KVA--2000KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG200C
Rated prime power	kva	250
Rated standard power	kva	275
Rated voltage line to line	V	400/230
Rated current	Α	361
Maximun sound level	dB(@7m)	≤100

	QSNT-G6
Turbo	o, Air/Air Cooling
	P7100 type
	6 in line
Liquid	8.9
mm	114*145
	16.6: 1
r/min	1500
Kw	243
	GAC Electrical
V	24
	Liquid mm r/min Kw

Exhause System		
Exhause gas flow	litre/sec	584
Exhause gas temp	${}^{\mathbb{C}}$	430
Max back pressure	kPa	10

Aspiration System			
Max inlet pressure	kPa	100	
Combustion volume	kPa	1	
Air flow	m³/min	248	

Fuel System		
100% load(Prime power)	L/h	53.0
75% load(Prime power)	L/h	39.0
50% load(Prime power)	L/h	27.0
Fuel tank capacity	L	480

Lubrication System		
Oil capacity	L	27.6
Oil consumption	g/kwh	0.5
Oil pressure	kPa	103-414
(continuous operation)		

Cooling System		
Coolant capacity	L	11.1
Thermostat operation range	$^{\circ}$ C	82-93
Max water temperature	$^{\circ}\!\mathbb{C}$	104

Alternator		
Model	LONGKAI	LK274K
	STAMFORD	UCDI274K
Phase		3
Voltage	V	400/230
Wiring Type	3 Pha	se 4 wire, Y type
Bearing		1
Power factor		8.0
Frequency	Hz	50
Prime power	KW	200
Exciter Type	Brushles	ss, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

LG200C

Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options






- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet





Standard Features

Engine(DCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

Unit Dimensions(Basic unit)

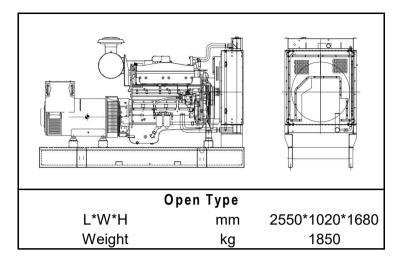

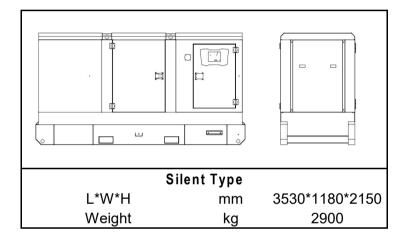

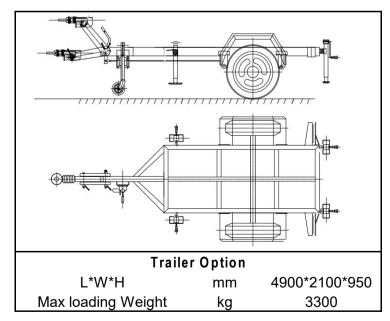

Options

Options		
Battery charge		0
Engine heater		\circ
Alternator heater		\circ
PMG		\bigcirc
Water oil separator		\circ
Daily fuel tank		\circ
Remote control panel		\circ
Automatic transfer switch	ch/ATS	\bigcirc
Switch box		\circ
Standard: ●	Ontions:	

Warranty*

Cummins Engine

12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

