# POWER YOUR FUTURE

# Cummins Generator LG200C

## MTA11-G2

Prime Power: 200KW/250KVA

Standby Power: 220KW/275KVA



## GENERATING POWER SOLUTIONS

### Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

#### **Increased uptime during operations**

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

#### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

#### Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

#### **Premium resale value**

Designed and built to last.



- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

**Cummins Series** 

25KVA--2000KVA



## FUAN LONGKAI POWER CO.,LTD.

#### **Headquarters:**

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



## **Technical Data**

Model		LG200C
Rated prime power	kva	250
Rated standard power	kva	275
Rated voltage line to line	V	400/230
Rated current	Α	361
Maximun sound level	dB(@7m)	≤100

Ε	ngine-DCEC Cummin	IS	
M	lodel		MTA11-G2
Α	spiration	Six cylinders, four strokes, in line, water coole	
F	uel system		PT-STC
Ν	o. cylinders		6 in line
D	isplacement	Liquid	10.8
В	ore*Stroke	mm	125*147
С	ompression ratio		16.1: 1
R	ated speed	r/min	1500
R	ated net power(with fan)	Kw	224
G	overnor type		Electrical
S	tart Motor	V	24

Exhause System		
Exhause gas flow	m³/min	510
Exhause gas temp	$^{\circ}$ C	510
Max back pressure	kPa	10

Aspiration System		
Max inlet pressure	kPa	100
Combustion volume	m³/min	/
Air flow	m³/min	263

Fuel System		
100% load(Prime power)	L/h	43.9
75% load(Prime power)	L/h	33.9
50% load(Prime power)	L/h	24.1
Fuel tank capacity	L	520

Lubrication System		
Oil capacity	L	36.7
Oil consumption	g/kwh	0.24
Oil pressure	kPa	207-276
(continuous operation)		

Cooling System		
Coolant capacity	L	12.9
Thermostat operation range	$^{\circ}\! \mathbb{C}$	82-93
Max water temperature	$^{\circ}$ C	100

Alternator		
Model	LONGKAI	LK274K
	STAMFORD UC	1274K-S4L1D-C41/S4L1S-C4
Phase		3
Voltage	V	400/230
Wiring Type	3 Phas	se 4 wire, Y type
Bearing		1
Power factor		8.0
Frequency	Hz	50
Prime power	KW	200
Exciter Type	Brushles	s, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

LG200C

## Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



#### Control Module Options






- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet





## Standard Features

Engine(DCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

## Unit Dimensions(Basic unit)

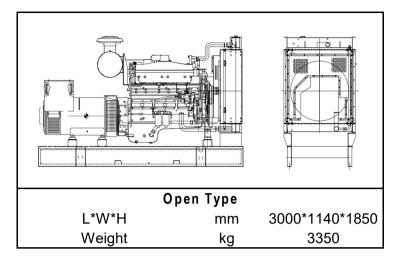

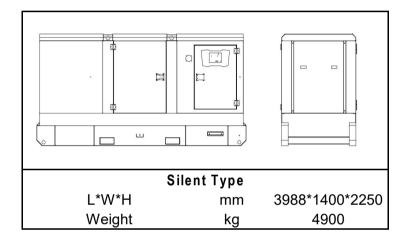

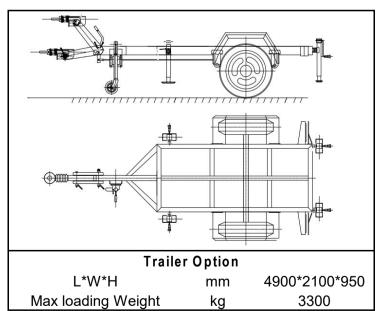

#### Options

Optiono		
Battery charge		0
Engine heater		$\circ$
Alternator heater		$\circ$
PMG		$\circ$
Water oil separator		$\circ$
Daily fuel tank		$\circ$
Remote control panel		$\circ$
Automatic transfer switch/A	ΓS	$\circ$
Switch box		$\circ$
Standard: ●	Options:0	

## Warranty\*

## **Cummins Engine**

12 months from date of purchase and 1000 hours.

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

