POWER YOUR FUTURE

4BT3.9-G2

Cummins Generator LG32C

Prime Power: 32KW/40KVA Standby Power: 35.2KW/44KVA

GENERATING POWER SOLUTIONS

Increased availability for new operations Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer

transport and installation.

Reduced service & maintenance costs

Longer service intervals. Quicker and more efficient service jobs.

Premium resale value Designed and built to last.

SAFETY

Operate safely in accordance with proper operation manual.
To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series 25KVA--2000KVA



FUAN LONGKAI POWER CO., LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian,China Tel:+86-0593-6309773 Fax:+86-0593-6586988 E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG32C
Rated prime power	kva	40
Rated standard power	kva	44
Rated voltage line to line	V	400/230
Rated current	А	58
Maximun sound level	dB(@7m)	96

Engine-DCEC Cummins

Model		4BT3.9-G2
Aspiration		turbo
Fuel system		A type
No. cylinders		4 in line
Displacement	Liquid	3.9
Bore*Stroke	mm	102*120
Compression ratio		18:01
Rated speed	r/min	1500
Rated net power(with fan)	Kw	36
Governor type	Mechanical/Electrical	
Start Motor	V	24

Exhause System		
Exhause gas flow	m³/min	108
Exhause gas temp	°C	487
Max back pressure	kPa	10

Aspiration System

Max inlet pressure	кра	1
Combustion volume	m³/min	/
Air flow	m³/min	44.9

1

Fuel System		
100% load(Prime power)	L/h	9.3
75% load(Prime power)	L/h	7.3
50% load(Prime power)	L/h	5.3
Fuel tank capacity	L	100

Lubrication System		
Oil capacity	L	10.9
Oil consumption	g/kwh	0.5
Oil pressure	kPa	345
(continuous operation)		

Cooling SystemCoolant capacityL7.2Thermostat operation range°C83-95Max water temperature°C110/104

Alternator			
Model	LONGKAI	LK184J	
	STAMFORD	PI144J-S1L2-K1	
Phase		3	
Voltage	V	400/230	
Wiring Type	3 Ph	ase 4 wire, Y type	
Bearing		1	
Power factor		0.8	
Frequency	Hz	50	
Prime power	KW	34	
Exciter Type	Brushle	ess, self-excitation	
Voltage regulation	%	±0.5	
Protection Grade		IP 23	
Insulation grade		H/H	
Altitude	m	≤1000	
Controller-DEEPSEA	1		
Model		DSE6120MK3	
Protective functions:			
Low oil pressure			
High water temperature			
High/low voltage			
High Engine Temperature and Overspeed.			
Voltage regulator frequency regulator			
Emergency stop			
Start failure			
N			



Control Module Options





Auto generator control module

Control module with" Three Remote Control" functions

- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

LG32C



Standard Features

Engine(DCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

Options

Battery charge		0
Engine heater		\bigcirc
Alternator heater		\bigcirc
PMG		\bigcirc
Water oil separator		0
Daily fuel tank		\bigcirc
Remote control panel		\bigcirc
Automatic transfer switch/AT	ſS	0
Switch box		0
Standard: •	Options: o	

Warranty*


Cummins Engine


12 months from date of purchase and 1000 hours.


Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

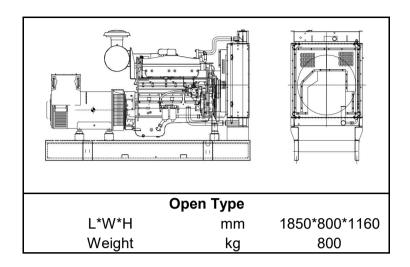

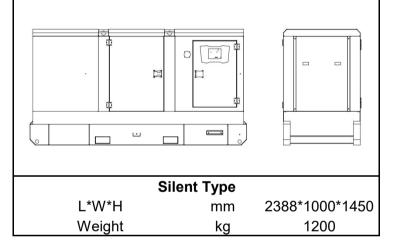

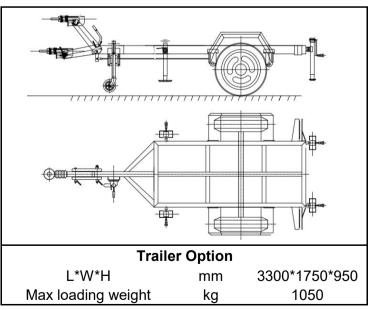



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.