POWER YOUR FUTURE

Cummins Generator LG360C

QSK19-G14

Prime Power: 360KW/450KVA

Standby Power: 396KW/495KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.



- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series 25KVA--2000KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

| Model | | LG360C |
|----------------------------|---------|---------|
| Rated prime power | kva | 450 |
| Rated standard power | kva | 495 |
| Rated voltage line to line | V | 400/230 |
| Rated current | Α | 650 |
| Maximun sound level | dB(@7m) | ≤100 |

| Engine-DCEC Cummins | | | |
|----------------------------|------------------------|-----------|--|
| Model | | QSK19-G14 | |
| Aspiration | Turbo, Air/Air cooling | | |
| Fuel system | | HPCR | |
| No. cylinders | | 6 in line | |
| Displacement | Liquid | 13 | |
| Bore*Stroke | mm | 130*163 | |
| Compression ratio | | 17.1 | |
| Rated speed | r/min | 1500 | |
| Rated net power(with fan) | Kw | 402 | |
| Governor type | | ECU | |
| Start Motor | V | 24 | |

| Exhause System | | |
|-------------------|-------------------------|----|
| Exhause gas flow | L/s | |
| Exhause gas temp | $^{\circ}\! \mathbb{C}$ | |
| Max back pressure | kPa | 13 |

| Aspiration System | | |
|--------------------|--------|-----|
| Max inlet pressure | kPa | 225 |
| Combustion volume | m³/min | / |
| Air flow | m³/min | |

| Fuel System | | |
|------------------------|-----|-----|
| 100% load(Prime power) | L/h | |
| 75% load(Prime power) | L/h | |
| 50% load(Prime power) | L/h | |
| Fuel tank capacity | L | 780 |
| | | |

| Lubrication System | | |
|---------------------------|-------|-------|
| Oil capacity | L | 45.42 |
| Oil consumption | g/kwh | ≤4 |
| Oil pressure | kPa | 82.7 |
| (continuous operation) | | |

| Cooling System | | |
|----------------------------|------------------------|------|
| Coolant capacity | L | 23.1 |
| Thermostat operation range | $^{\circ}\!\mathbb{C}$ | 82 |
| Max water temperature | $^{\circ}\!\mathbb{C}$ | 102 |

| Alternator | | |
|---------------------------|----------|----------------------|
| Model | LONGKAI | LK544B |
| | STAMFORD | HCI544C-S4L1D-G41 |
| Phase | | 3 |
| Voltage | V | 400/230 |
| Wiring Type | 3 Ph | ase 4 wire, Y type |
| Bearing | | 1 |
| Power factor | | 0.8 |
| Frequency | Hz | 50 |
| Prime power | KW | 330 |
| Exciter Type | Brushle | ess, self-excitation |
| Voltage regulation | % | ±0.5 |
| Protection Grade | | IP 23 |
| Insulation grade | | H/H |
| Altitude | m | ≤1000 |
| Controller-DEEPSEA | | |

LG360C

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options





- Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- Synchronising control modules
- ■Power output cabinet



Standard Features Engine(DCEC Cummins) Radiator 50°C max,fans are driven by bel 24V charge alternator Alternator: single bearing alternator IP23, insulation class H/H Standard auto control system One set of air filter, fuel filter, oil filter Main line circuit breaker/MCCB Base fuel tank Two 24V batteries, rac and cable Exhaust system(Ripple flex exhaust pipe,

Options Battery charge 0 Engine heater \bigcirc Alternator heater \bigcirc **PMG** \bigcirc Water oil separator \bigcirc Daily fuel tank \bigcirc Remote control panel \bigcirc Automatic transfer switch/ATS \bigcirc Switch box Standard: • Options:0

Warranty*

User manual

Cummins Engine


exhaust siphon, flange, muffler


12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

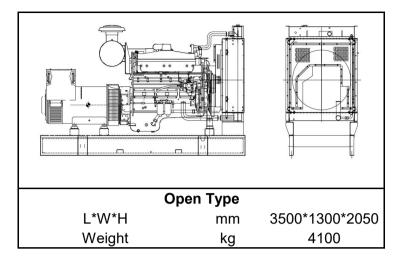

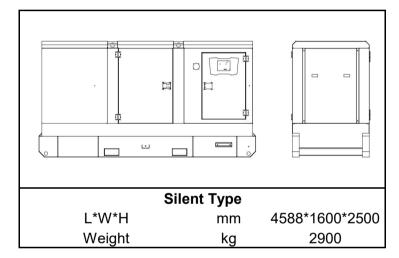



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.