## POWER YOUR FUTURE Cummins Generator LG470C

## QSK19-G6

Prime Power: 470KW/587.5KVA Standby Power: 517KW/646.25KVA



## **GENERATING POWER SOLUTIONS**

**Increased availability for new operations** Reliable, robust and versatile generator. Ready to deliver power for a next job.

**Increased uptime during operations** Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

#### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer

transport and installation.

Reduced service & maintenance costs

Longer service intervals. Quicker and more efficient service jobs.

**Premium resale value** Designed and built to last.

#### **SAFETY**

Operate safely in accordance with proper operation manual.
To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

## Cummins Series 25KVA--2000KVA



#### FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian,China Tel:+86-0593-6309773 Fax:+86-0593-6586988 E-mail: sales@longkaipower.com Web: www.longkaipower.com



## **Technical Data**

Model		LG470C
Rated prime power	kva	587.5
Rated standard power	kva	646.25
Rated voltage line to line	V	400/230
Rated current	А	848
Maximun sound level	dB(@7m)	≤102

#### Engine-DCEC Cummins

Model		QSK19-G6	
Aspiration	4 stroke, 60°V type 12 cylinder		
Fuel system		PT type	
No. cylinders		V 12	
Displacement	Liquid		
Bore*Stroke	mm	159*159	
Compression ratio			
Rated speed	r/min	1500	
Rated net power(with fan)	Kw	520	
Governor type		EFC Electrical	
Start Motor	V	24	

Exhause System		
Exhause gas flow	L/s	
Exhause gas temp	$^{\circ}\mathrm{C}$	
Max back pressure	kPa	10

# Aspiration SystemMax inlet pressurekPa100Allow intake resistancekPa/Air flowL/s

Fuel System		
100% load(Prime power)	L/h	
75% load(Prime power)	L/h	
50% load(Prime power)	L/h	
Fuel tank capacity	L	950
	(Exter	nal Fuel Tank)
Lubrication System		
Oil capacity	1	50
On oupdoily	-	50
Oil consumption	g/kwh	0.85
	g/kwh kPa	

#### **Cooling System**

Coolant capacity	L	30
Thermostat operation range	°C	82-93
Max water temperature	°C	104

Alternator				
Model	LONGKAI	LK544E		
	STAMFORD +	STAMFORD HCI544FS-S5L1D-F4/S5L1S-F4		
Phase		3		
Voltage	V	400/230		
Wiring Type	3 Pha	ase 4 wire, Y type		
Bearing		1		
Power factor		0.8		
Frequency	Hz	50		
Prime power	KW	500		
Exciter Type	Brushle	Brushless, self-excitation		
Voltage regulation	%	±0.5		
Protection Grade		IP 23		
Insulation grade		H/H		
Altitude	m	≤1000		
Controller-DEEPSE	Α			
Model		DSE6120MK3		
Protective functions:				
Low oil pressure				
High water temperature	9			
High/low voltage				
High Engine Temperature and Overspeed.				
Voltage regulator frequency regulator				
Emergency stop				
Stort failura				

Start failure



#### **Control Module Options**

SmartGon Genser Controller	InteliLite 9	ComAp
		A TEST R aded 10000 0,720 M 1500 Timer op Set 00:00
	₫	
	. <u>Д</u> . — т.	

Auto generator control module

- Control module with" Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet


#### LG470C



#### **Standard Features**

Engine(CCEC Cummins)
Radiator 50°C max, fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

#### Unit Dimensions(Basic unit)

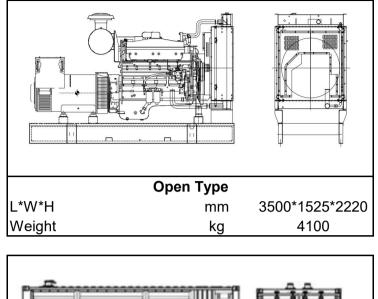

### Options

· · · ·		
Battery charge		0
Engine heater		0
Alternator heater		0
PMG		0
Water oil separator		0
Daily fuel tank		0
Remote control panel		0
Automatic transfer switch/AT	S	0
Switch box		0
Standard: •	Options:o	


#### Warranty\*

#### **Cummins Engine**

12 months from date of purchase and 1000 hours.

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

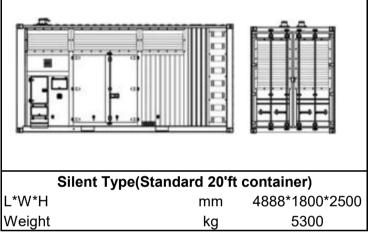



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.