# POWER YOUR FUTURE

# Cummins Generator LG720C

# KTA38-G2A

Prime Power: 728KW/910KVA

Standby Power: 800.8W/1001KVA



# GENERATING POWER SOLUTIONS

### Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

#### **Increased uptime during operations**

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

#### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

#### Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

#### **Premium resale value**

Designed and built to last.



- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series 25KVA--2000KVA



# FUAN LONGKAI POWER CO.,LTD.

#### **Headquarters:**

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



# **Technical Data**

Maximun sound level

Model		LG720C
Rated prime power	kva	910
Rated standard power	kva	1001
Rated voltage line to line	V	400/230
Rated current	Α	1314

dB(@7m)

≤102

<b>Engine-DCEC Cummin</b>	s	
Model		KTA38-G2A
Aspiration	4 stroke, 60°V	type 12 cylinder diesel engine
Fuel system		PT type
No. cylinders		V 12
Displacement	Liquid	38
Bore*Stroke	mm	159*159
Compression ratio		14.5:1
Rated speed	r/min	1500
Rated net power(with fan)	Kw	813
Governor type		<b>EFC Electrical</b>
Start Motor	V	24

Exhause System		
Exhause gas flow	L/s	2759
Exhause gas temp	$^{\circ}\!\mathbb{C}$	507
Max back pressure	kPa	10

kPa	100
kPa	6.23-3.74
L/s	1001
	kPa

Fuel System		
100% load(Prime power)	Kg/h	165
75% load(Prime power)	Kg/h	128
50% load(Prime power)	Kg/h	91
Fuel tank capacity	L	1500
	(Exter	nal Fuel Tank

	(=::::::	
Lubrication System		
Oil capacity	L	135.1
Oil consumption	g/kwh	≤4
Oil pressure	kPa	138
(continuous operation)		

Cooling System		
Coolant capacity	L	123.8
Thermostat operation range	${\mathbb C}$	82-93
Max water temperature	$^{\circ}$ C	104

	LG720C
Margator LONGKAL BOWER	

Model	LONGKAI	LK634D
	STAMFORD	LVI634D-HCI634H-S6L1D-D4
Phase		3
Voltage	V	400/230
Wiring Type	3 Ph	ase 4 wire, Y type
Bearing		1
Power factor		8.0
Frequency	Hz	50
Prime power	KW	728
Exciter Type	Brushle	ess, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

## **Controller-DEEPSEA**

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



# **Control Module Options**






- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet





#### **Standard Features**

Engine(CCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

# Unit Dimensions(Basic unit)

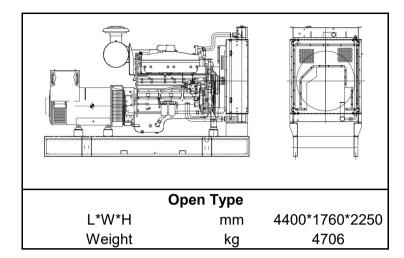

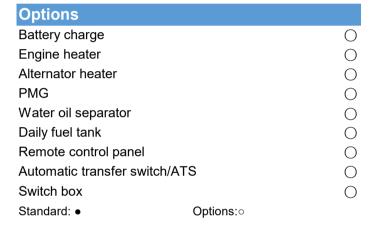

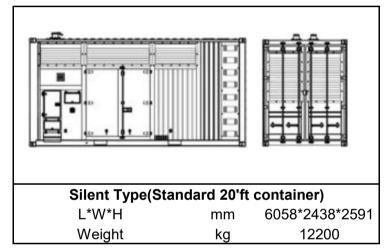

# Warranty\*

## **Cummins Engine**

12 months from date of purchase and 1000 hours.

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.